



LCD Replacement

How to replace the LCD and tactile touch screen (Both need to be changed at the same time)

Written By: Kevin Tran

INTRODUCTION

For those of you who aren't as confident replacing a mobile phone screen, don't worry. This was the first time I did so too.



TOOLS:

- [iFixit Opening Tools](#) (1)
 - [Phillips #000 Screwdriver](#) (1)
-

Step 1 — LCD



- Required tools:
- Tools
- LCD Screen and Tactile touch screen
- Optional: Double sided adhesive tape

Step 2




- Don't forget to remove the SIM card and the SD card.

Step 3



- Remove the case tab on the bottom of the phone with a spudger or a pick.

Step 4

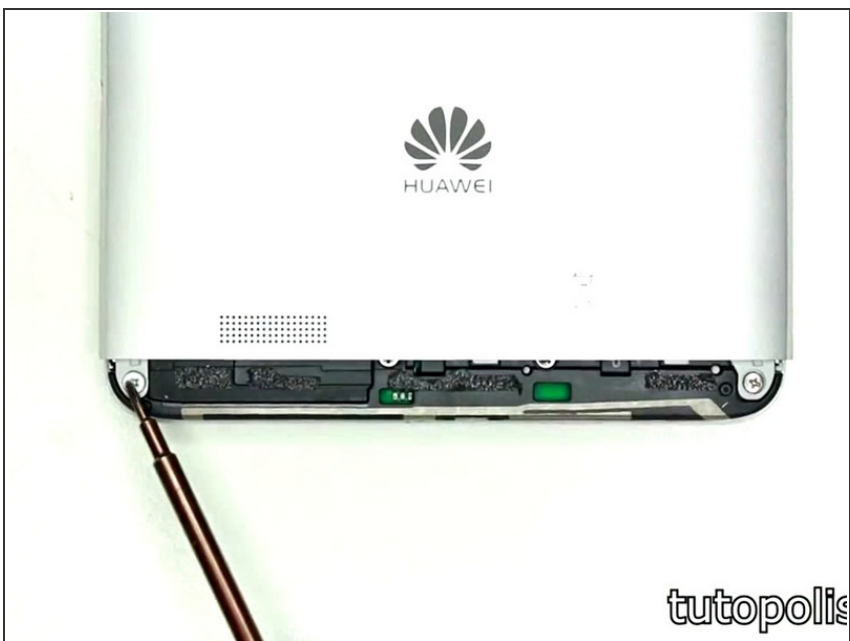

- Unscrew the two screws on the left and right of the case.

Step 5



- Using the spudger/pick, remove the rest of the rear case.
- Once this has been un-clipped, slowly lift the case until you can see the connector between the case and the main body of the phone. Un-clip this with your tool too.

To reassemble the device, follow the instructions in reverse order.

This document was last generated on 2017-06-29 05:43:05 PM.